

**BEST**  
**STURDY**  
**SENSUOUS**


# SECURANCE GATE

## SR-1400 Series


**SR-1400E**




# SR-1400E

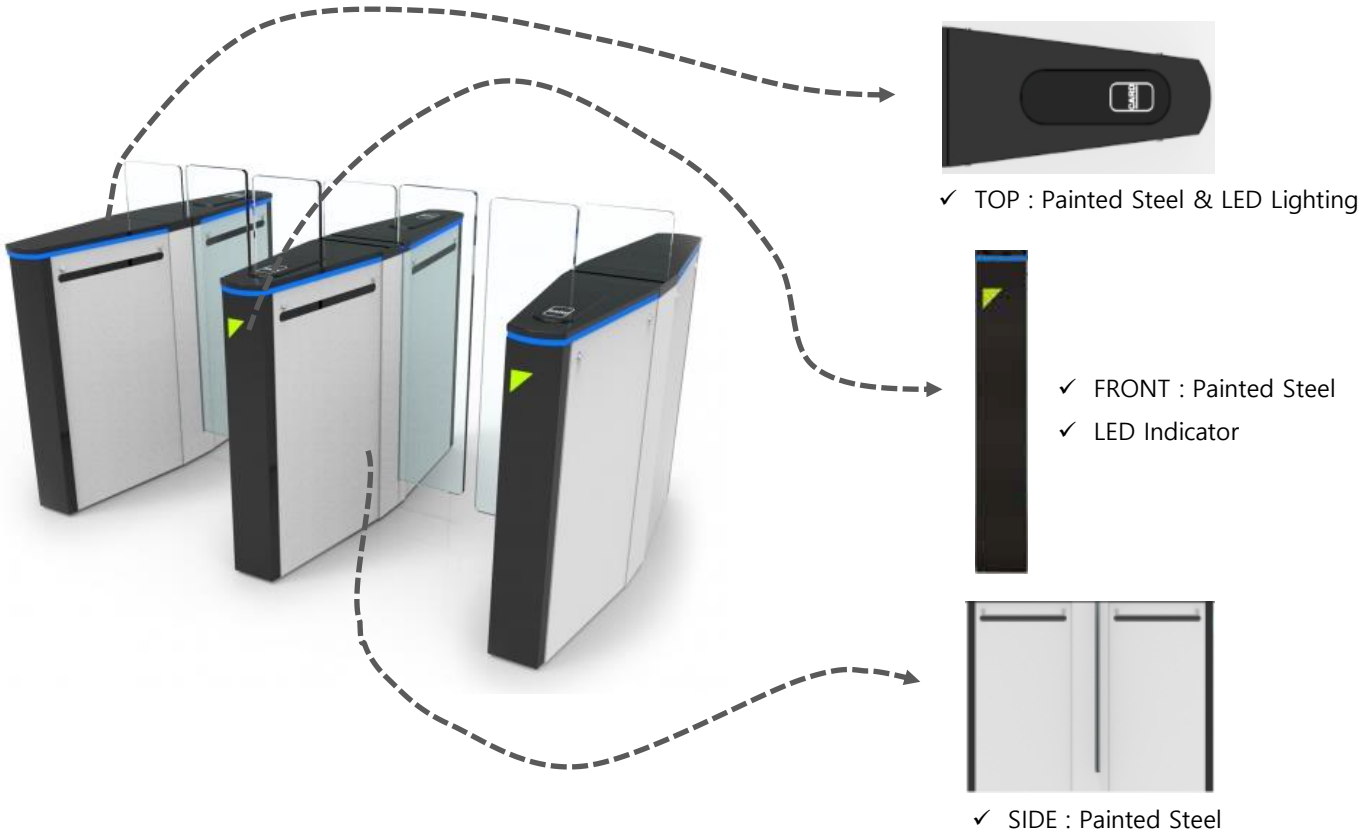


## ◆ Gate Configuration

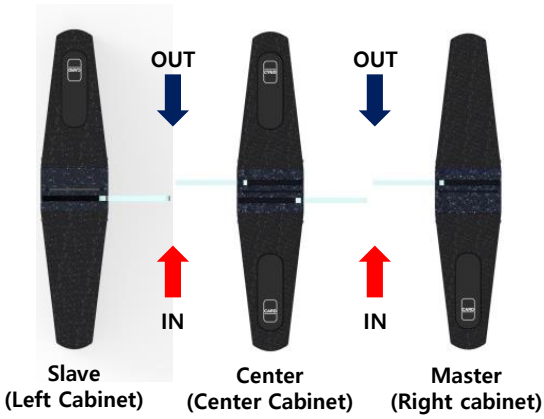


## ◆ Lane Configuration

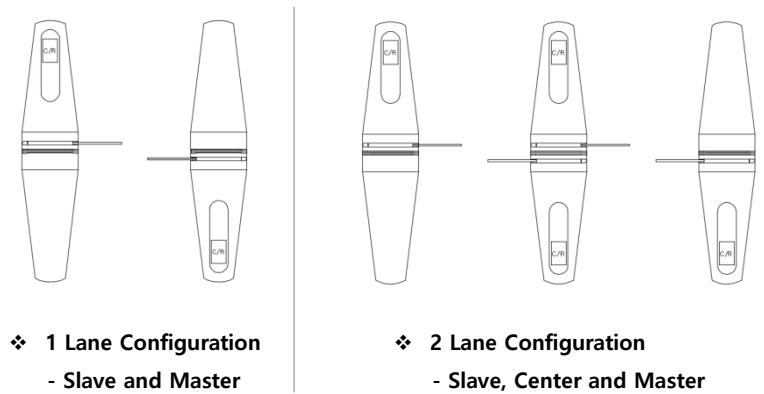

## ◆ Sensors

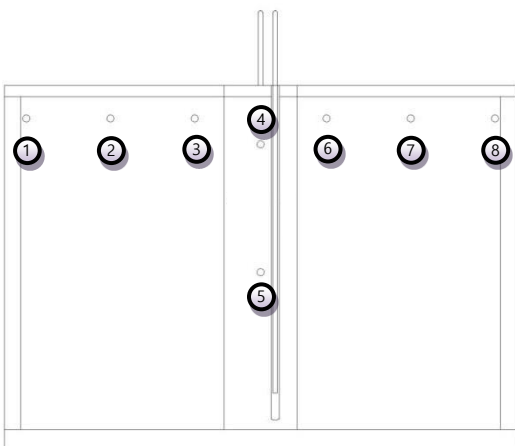

## ◆ Installation case

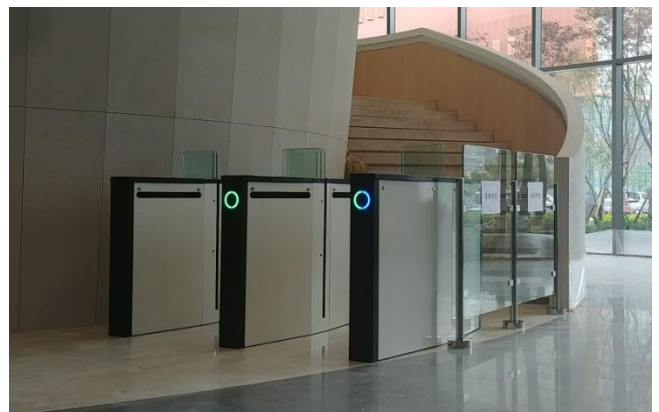


# SR-1400E

## Features


- **Design**  
- Various color and design make it particularly suitable for various area
- **Capacity**  
- Normally 40 ~ 60 persons per minute
- **Blocks reverse entry**
- **Anti-tailgating, Anti- Piggybacking**

## Specification


<b>Opening / Closing Time</b>	0.5 ~ 1 sec.
<b>Motor</b>	BLDC Motor
<b>Power</b>	AC 220/240V, 50/60Hz, 350W
<b>Operating Temperature</b>	-15°C ~ +45°C
<b>Certification</b>	KC, CE, EMC
<b>Weight (Kg)</b>	Center : 200 / Slave, Master : 160
<b>Glass Height (mm)</b>	900 ~ 1,800
<b>Dimensions (mm)</b>	Housing Length : 1,400 Housing Height : 1,000 Housing Width : 300
<b>Finish</b>	Top : Painted Steel Front : Painted Steel Side : Painted Steel Wings : 10mm Tempered Glass




AC220 / 240V




80W ~ 350W




Passenger direction



Persons / min



Operating temperature



BLDC Motor

## ◆ LED Indicator



**BLUE**  
Stand by



**GREEN**  
Authorized use /  
Designated free passage  
Proceed through the unit



**RED**  
Unit in use / Block  
Passage not authorized

## Dimensions (mm)

